

# MITSUTECH INTERNATIONAL CORP.

This product is RoHS compliant

## § SPECIFICATION APPROVAL SHEET §

**Fdt Tech Module No** MT065GVAB~~X~~**FXR**

**Description:** 6.5" Digital TFT-LCD Module

**SPEC No.:** SAS-1101001

**Version:** 0.0

**Issue Date:** January 10, 2011

※ This approval sheet contains 25 pages including the cover and appendix.

**Customer:**

**APPROVED BY:**

**Date:** / / 11

**APPROVED BY:**

**CHECKED BY:**


**DESIGNED BY:**

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

## 6.5" Digital TFT-LCD Module

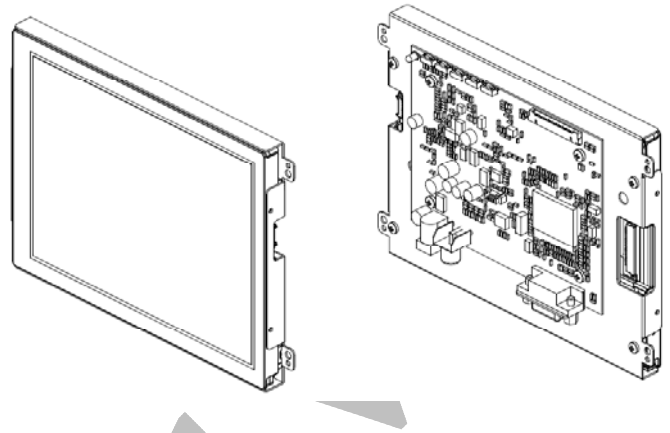

### ■ MT065GVAB~~x~~F~~x~~R

## 1. General Description

### 1.1 Features

- AUO G065VN01\_V2 Digital TFT LCD
- Ultra Compact
- NTSC/PAL/SECAM Video Auto Switch
- Single Operation Voltage +12V
- CVBS / S-Video (Option) / Analog RGB (PC Mode) Signal Input
- All Functions can be controlled by UART
- Support Touch Screen Function (Option)

### 1.2 Applications

- Portable product
- Industrial
- Hand-held
- Security
- Instrument Display
- Office Electronics

### 1.3 Application Precautions

Do not use the products herein for the following equipment which demands extremely high performance in terms of functionality, reliability, or accuracy.

- Aerospace equipment
- Communication equipment for trunk lines.
- Control equipment for the nuclear power industry.
- Medical equipment related to life support, etc.

The other application that demands high reliability and functionality should first contact a sales representative.

## 2. Contents


Contents	Page
<b>1. General Description.....</b>	<b>1</b>
1.1 Features	1
1.2 Applications	1
1.3 Application Precautions	1
<b>2. Contents.....</b>	<b>2-3</b>
<b>3. Black Diagram.....</b>	<b>4</b>
3.1 Black Diagram	4
<b>4. TFT-LCD Information.....</b>	<b>5</b>
4.1 TFT-LCD Mechanical Specifications	5
4.2 TFT-LCD Optical Characteristics	5
<b>5. Order Information.....</b>	<b>6</b>
5.1 Unit (CVBS/PC)	6
5.1 Unit (CVBS/PC/4W TSP)	7
<b>6. Dimension Information.....</b>	<b>8-10</b>
6.1 Unit (LP065GVAB1-FNR)	8
6.2 Unit (LP065GVAB4-FNR)	9
6.3 Unit (LP065GVAB5-FNR)	10
<b>7. Pin Description.....</b>	<b>11-14</b>
7.1 J302 : PVI LCD Panel I/O Terminals (20 Pin LVDS Connector Pitch 1.25mm Side Entry Type)	11
7.2 J101B : Pin Assignment of Analog RGB Input ( D-Sub 15Pin)	12
7.3 J101: Pin Assignment of UART (Pitch 1.25mm 4Pin, Top Entry Type)	12
7.4 J601: Pin Assignment of Signal Input (Pitch 1.25mm 6Pin, Side Entry Type)	13
7.5 DC JACK: Pin Assignment of Power Input (Inside Diameter:2.1 $\phi$ Outside Diameter:5.5 $\phi$ Side Entry Type)	13
7.6 RCA JACK: Pin Assignment of Video Input (RCA JACK Yellow, Side Entry Type)	13
7.7 J401B : Pin Assignment of Touch USB (USB-Female 2.0mm, Side Entry Type )(Option)	13
7.8 J401C : Pin Assignment of Touch RS232 (D-SUB 9 FEMALE)(Option)	14
<b>8. Absolute Maximum Ratings.....</b>	<b>14</b>
8.1 Absolute Maximum Ratings	14
<b>9. Recommended Operating Conditions.....</b>	<b>15</b>
9.1 Electrical Characteristics	15
9.2 VGA Mode Characteristics	15
9.3 Panel Backlight Data	15
9.4 Sample Test Data	15
<b>10. 4W Resistance Touch Panel Characteristics.....</b>	<b>16-18</b>
10.1 Touch Screen Integration Design Guide	16
10.2 Pin Assignment ( Pitch : 1.0mm)	17
10.3 Electrical Performance	17
10.4 Optical Performance	17

10.5 Mechanical Performance	17
10.6 Durability Performance	18
10.7 Environmental	18
10.8 Reliability Test Procedure	18
<b>11. Operation Manual</b> .....	19
11.1 Driver Board Manual	19
<b>12. Packing List</b> .....	20
<b>13. Key Function by OSD</b> .....	21-24
13.1 Menu Operation	21-23
13.2 Operations	24

Tentative

### 3. Block Diagram

#### 3.1 Block Diagram

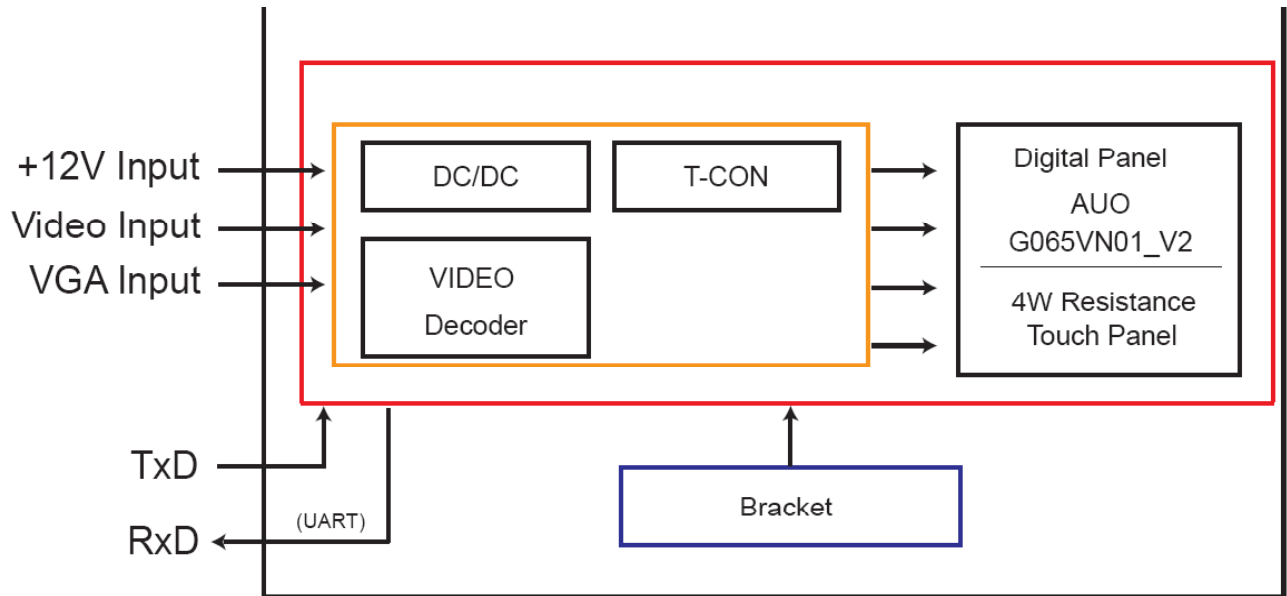

## 4. TFT-LCD Information

### 4.1 TFT-LCD Mechanical Specifications


Parameter	Specifications	Unit
Screen Size	6.5 (diagonal)	inch
Display Format	640 x (R.G.B) x 480	dot
Active Area	132.48(H) x 99.36(V)	mm
Pixel Pitch	0.207 (H) x 0.207 (V)	mm
Pixel Configuration	Stripe	
Outline Dimension	153.0 (W) x 118.0 (H) x 10.9 (typ.) (D)	mm
Surface Treatment	Anti-glare and EWV	
Weight	170 (Typ)	g

### 4.2 TFT-LCD Optical Characteristics

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Remark
Viewing Angle	Horizontal	Left	70	80		deg	
		Right	70	80		deg	
	Vertical	Top	60	70	-	deg	
		Bottom	60	70	-	deg	
Contrast Ratio	CR		400	600	-	---	
Response time	Rise Fall	Tr	-	15	20	ms	
		Tf	-	10	15	ms	
Uniformity	U		-	-	1.25	%	
Brightness		$\theta = 0^\circ \varphi = 0$	600	800		Cd/m <sup>2</sup>	
White Chromaticity	X		0.28	0.32	0.36	---	
	y		0.31	0.35	0.39	---	
LED Life Time			50000	-	-	hrs	


## 5. Order Information

### 5.1 Unit (CVBS/PC)

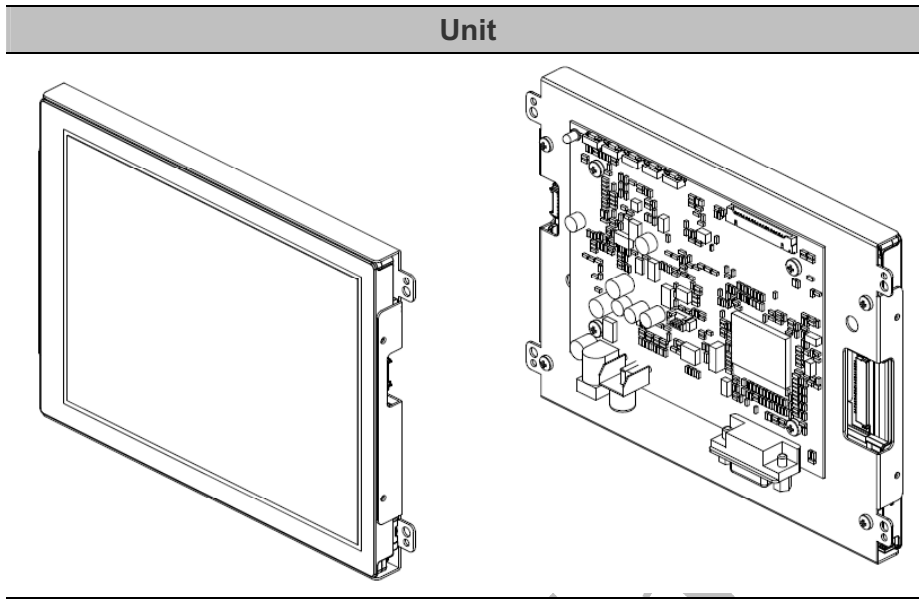

Parameter	MT065GVAB1-FBR	MT065GVAB1-FNR	Unit
<b>CVBS</b>	1	1	
<b>VGA (D-Sub15 / 2.0mm 14Pin)</b>	D-Sub15	D-Sub15	
<b>AC to DC Adapter 12V/2.5A</b> (LASTD12025-FDR)	⊙	-	
<b>Power Cord</b> <b>Plug Type B for USA</b> (LAAC818000-FDR)	⊙	-	
<b>Video Cable</b> (LAVDO18000-FDR)	⊙	-	
<b>VGA Cable</b> (LAVGA16000-FDR)	⊙	-	

**5.2 Unit (CVBS/PC/4W TSP)**

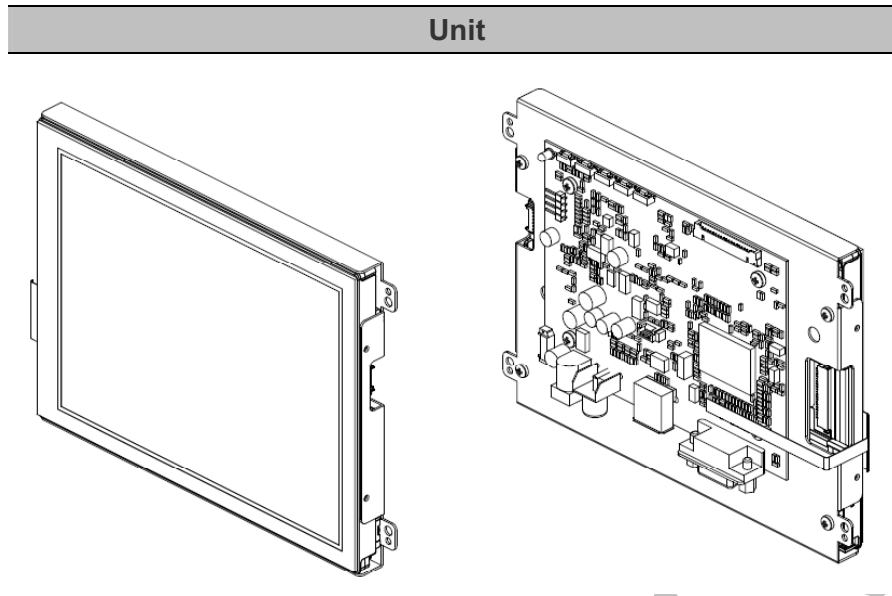


Parameter	MT065GVAB4-FBR	MT065GVAB5-FBR	MT065GVAB4-FNR	MT065GVAB5-FNR	Unit
<b>CVBS</b>	1	1	1	1	
<b>VGA (D-Sub15 / 2.0mm 14Pin)</b>	D-Sub15	D-Sub15	D-Sub15	D-Sub15	
<b>Touch Panel Type</b>	4W Resistive	4W Resistive	4W Resistive	4W Resistive	
<b>Touch Screen Interface</b>	USB	RS232	USB	RS232	
<b>AC to DC Adapter 12V/2.5A</b> (LASTD12025-FDR)	⊙	⊙	-	-	
<b>Power Cord</b> <b>Plug Type B for USA</b> (LAC818000-FDR)	⊙	⊙	-	-	
<b>Video Cable</b> (LAVDO18000-FDR)	⊙	⊙	-	-	
<b>VGA Cable</b> (LAVGA16000-FDR)	⊙	⊙	-	-	
<b>USB Cable</b> (LAUSB18000-FDR)	⊙	-	-	-	
<b>RS-232 Cable</b> (LARS218000-FDR)	-	⊙	-	-	
<b>Touch Screen Driver CD Disk</b>	⊙	⊙	⊙	⊙	






6.2 Unit (MT065GVAB4-FNR)

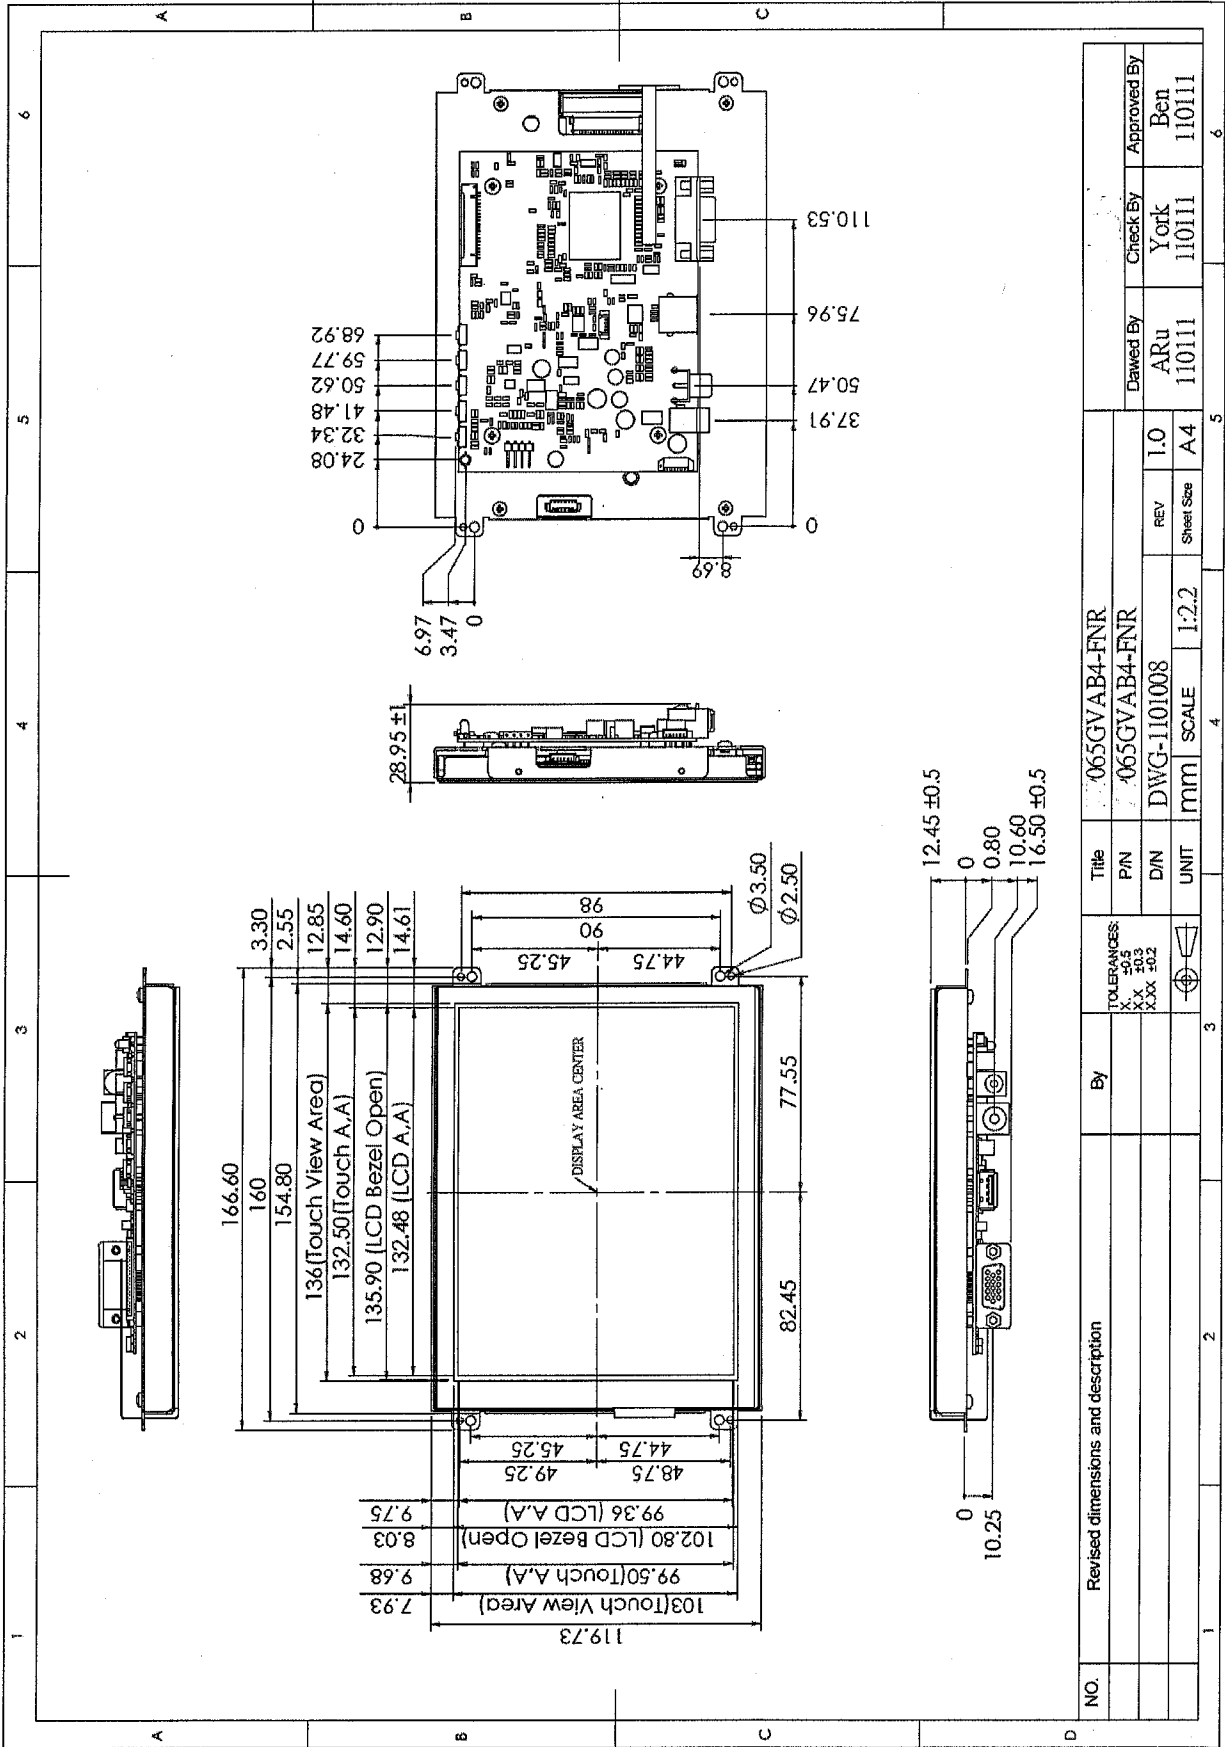

MT065GVAB4-FNR

6.3 Unit (MT065GVAB5-FNR)

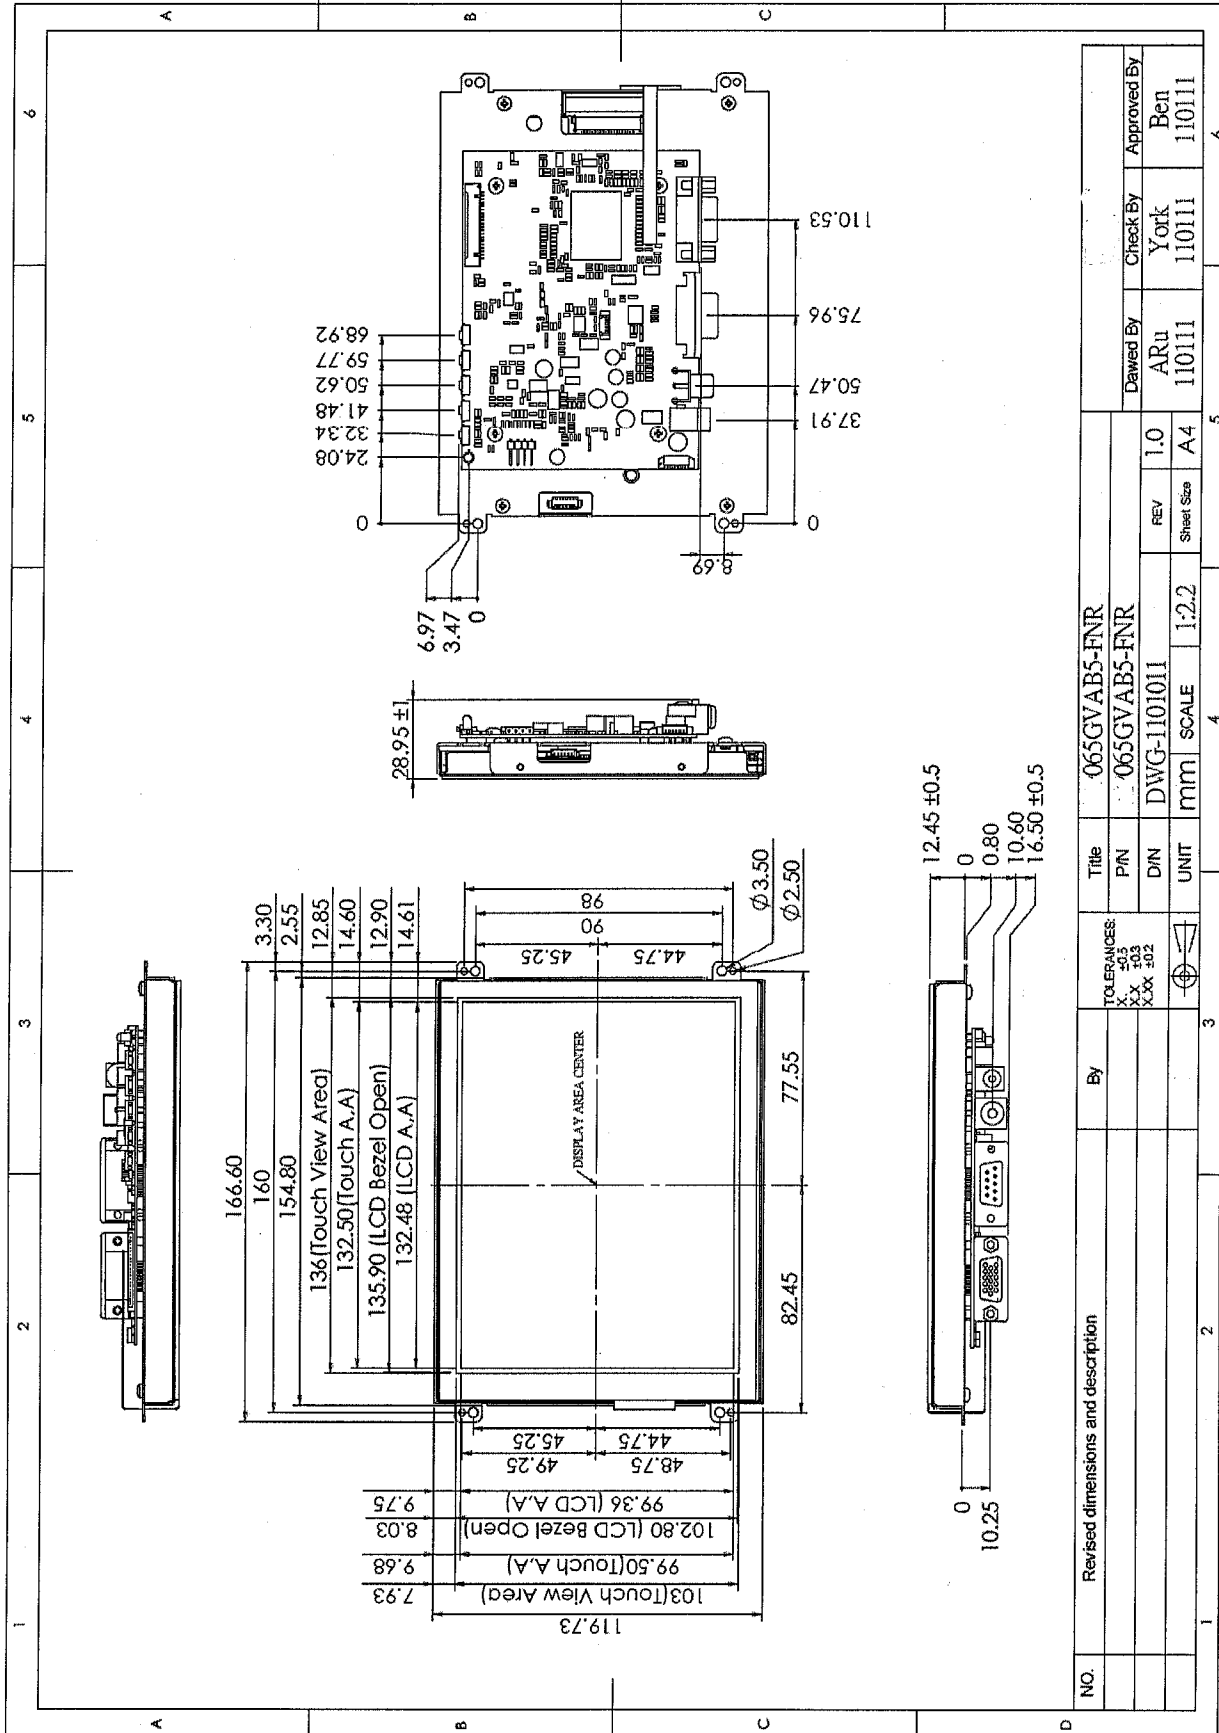

## 7. Pin Description

### 7.1 J302 : AUO LCD Panel I/O Terminals (20 Pin LVDS Connector Pitch 1.25mm Side Entry Type)


※ Connector Part No.: FI-SEB20P-HF13E (JAE) or MS240420G (STM) ; Matching Connector Part No.: FI-S20S (JAE) or P240420 (STM)

Pin No	Symbol	I/O	Description	Remark
1	VDD	I	Power supply, 3.3V (typical)	
2	VDD	I	Power supply, 3.3V (typical)	
3	GND	-	Ground	
4	SEL68	I	Selection for either 6bit or 8bit LVDS input: SEL68 = "Low" or "NC", accepts 6bit LVDS data input; SEL68 = "High", accepts 8bit LVDS data input.	
5	RxIN1-	I	Negative LVDS differential input (R0-R5, G0)	
6	RxIN1+	I	Positive LVDS differential input (R0-R5, G0)	
7	GND	-	Ground	
8	RxIN2-	I	Negative LVDS differential input (G1-G5, B0-B1)	
9	RxIN2+	I	Positive LVDS differential input (G1-G5, B0-B1)	
10	GND	-	Ground	
11	RxIN3-	I	Negative LVDS differential input (B2-B5, DE)	
12	RxIN3+	I	Positive LVDS differential input (B2-B5, DE)	
13	GND	-	Ground	
14	RxCLKIN-	I	Negative LVDS differential clock input	
15	RxCLKIN+	I	Positive LVDS differential clock input	
16	GND	-	Ground	
17	U/D	I	Vertical Reverse ("Low" or NC: Normal, "High": Reverse)	
18	R/L	I	Horizontal Reverse ("Low" or NC: Normal, "High": Reverse)	
19	RxIN4-	I	Negative LVDS differential input (R6-R7, G6-G7, B6-B7) NC for 6bit LVDS input.	
20	RxIN4+	I	RxIN4+ Positive LVDS differential input (R6-R7, G6-G7, B6-B7) NC for 6bit LVDS input	

Note: "Low" stands for 0V. "High" stands for 3.3V. "NC" stands for "No Connection".

**7.2 J101B : Pin Assignment of Analog RGB Input ( D-Sub 15Pin)**

Pin No	Symbol	I/O	Description	Remark
1	RI+	I	Analog Red Signal	
2	GI+	I	Analog Green Signal	
3	BI+	I	Analog Blue Signal	
4	NC	-	No Connection	
5	GND	-	Ground	
6	AGND	-	Analog Ground	
7	AGND	-	Analog Ground	
8	AGND	-	Analog Ground	
9	VGA5V	-	VGA +5V Input	
10	VGA-Det	I	VGA Detect	
11	NC	-	No Connection	
12	NC	-	No Connection	
13	HS_IN	I	TTL Horizontal sync	
14	VS_IN	I	TTL Vertical sync	
15	NC	-	No Connection	

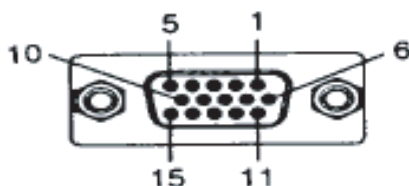


**7.3 J101: Pin Assignment of UART (Pitch 1.25mm 4Pin, Top Entry Type)**

※ Connector Part No.: 53398-0471 (MOLEX) or MS24014 (STM); Matching Connector Part No.: 51021-0400 (MOLEX) or P24014 (STM)

Pin No	Symbol	I/O	Description	Remark
1	TX	O	UART Transmission Data	
2	RX	I	UART Receive Data	
3	GND	-	Ground	
4	+3.3VA	O	+3.3V Output Voltage	

Note: All Functions can be controlled by UART , About UART command list please contact FDT sales.

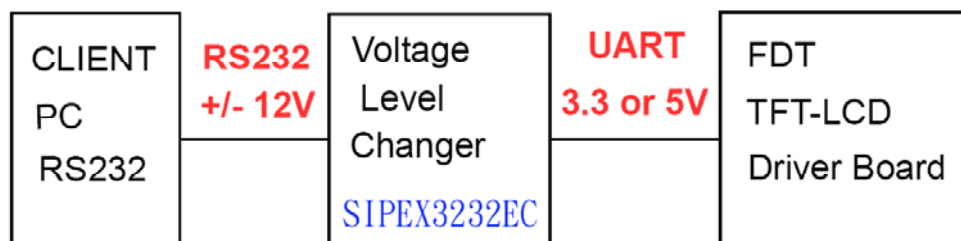

**7.4 J601: Pin Assignment of Signal Input (Pitch 1.25mm 6Pin, Side Entry Type)**

※ Connector Part No.: 53261-0619 (MOLEX) or MS24016R (STM); Matching Connector Part No.: 51021-0600 (MOLEX) or P24016 (STM)

Pin No	Symbol	I/O	Description	Remark
1	VLED	-	+12V Input Voltage	
2	VLED	-	+12V Input Voltage	
3	GND_D	-	Ground	
4	GND_D	-	Ground	
5	LED On/Off	I	3.3V-On; 0V/NC-Off	
6	PWM DIM	I	1~100%	

**7.5 DC JACK: Pin Assignment of Power Input (Inside Diameter:2.1 φ Outside Diameter:5.5 φ Side Entry Type)**

Pin No	Symbol	I/O	Description	Remark
1	VIN	I	+12V Input Voltage	
2	GND	-	Power Ground	

**7.6 RCA JACK: Pin Assignment of Video Input (RCA JACK Yellow, Side Entry Type)**

Pin No	Symbol	I/O	Description	Remark
1	Video	I	Video Input	
2	AGND	-	Analog Ground	

**7.7 J401B : Pin Assignment of Touch USB (USBA-Female 2.0mm, Side Entry Type )(Option)**

Pin No	Symbol	I/O	Description	Remark
1	DGND	-	Digital Ground	
2	D+	-	DATA (+)	
3	D-	-	DATA (-)	
4	VBUS	-	USB VCC	

### 7.8 J401C : Pin Assignment of Touch RS232 (D-SUB 9 FEMALE)(Option)

Pin No	Symbol	I/O	Description	Remark
1	NC	-	No Connection	
2	TXD	-	Transmit Data	
3	RXD	-	Receive Data	
4	NC	-	No Connection	
5	GND	-	Ground	
6	NC	-	No Connection	
7	NC	-	No Connection	
8	NC	-	No Connection	
9	NC	-	No Connection	

## 8. Absolute Maximum Ratings

### 8.1 Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Remark
Input Voltage	Vin	+9	+15	V	
Video Input Signal	Video in	0.5	2.0	Vp-p	@75Ω
S-Video Input Signal	S-Video in	0.5	2.0	Vp-p	@75Ω
Analog RGB Input Signal	Analog RGB in	0.5	2.0	Vp-p	@75Ω
Digital Input Signal	TTL	+0.3	+3.6	V	
Operating Temperature		-20	+70	°C	
Storage Temperature		-20	+70	°C	
Operating Temperature With TSP		-20	+70	°C	
Storage Temperature With TSP		-20	+70	°C	

## 9. Recommended Operating Conditions

### 9.1 Electrical Characteristics

Parameter	Symbol	I/O	Min	Typ	Max	Unit	Note
Input Voltage	Vin	I	+10	+12	+14	V	
Total Current	Iin	I	-	-	-	mA	
Power Consumption		I	-	-	-	W	@+12V
Output Voltage	VDD	O	+3.2	+3.3	+3.4	V	I=10mA
Video Input Signal	Video in	I		1.0		Vp-p	@75Ω
Analog RGB Input Signal	Analog RGB in	RGB	I	0.7		Vp-p	@75Ω

### 9.2 VGA Mode Characteristics

Dots per inch	H	Unit	Polarity	V	Unit	Polarity	Note
640*480	31.469	KHz	Negative	59.941	Hz	Negative	
800*600	37.879	KHz	Positive	60.317	Hz	Positive	
1024*768	48.363	KHz	Negative	60.004	Hz	Negative	

### 9.3 Panel Backlight Data

Parameter	Symbol	Min	Typ	Max	Unit	Note
Supply voltage of LED backlight	VL	9	12	20	V	
Supply current of LED backlight	IL		250		mA	

### 9.4 Sample Test Data

Parameter	White Window	Red	Green	Blue	Remark
S/N : 001 x	-	-	-	-	
.y	-	-	-	-	±15%
L(cd/m <sup>2</sup> )	-	-	-	-	
TC(°K)	-	-	-	-	

NOTE : 1. Luminance Meter : BM-7 FAST(TOPCON)

2. Patrn Generator: FLUKE PM54200

3. Measurement Distance : 500mm±50mm

4. TOPCON BM-7 Luminance Meter 2° filed of view is used in the testing

(After 10min ~20min operation)




## 10. 4W Resistance Touch Panel Characteristics


### 10.1 Touch Screen Integration Design Guide

Avoid the design that Front-case overlap and press on the active area of the touch-panel.

Give enough gap (over 0.5mm at compressed) between the front case and touch-panel to protect wrong operating.

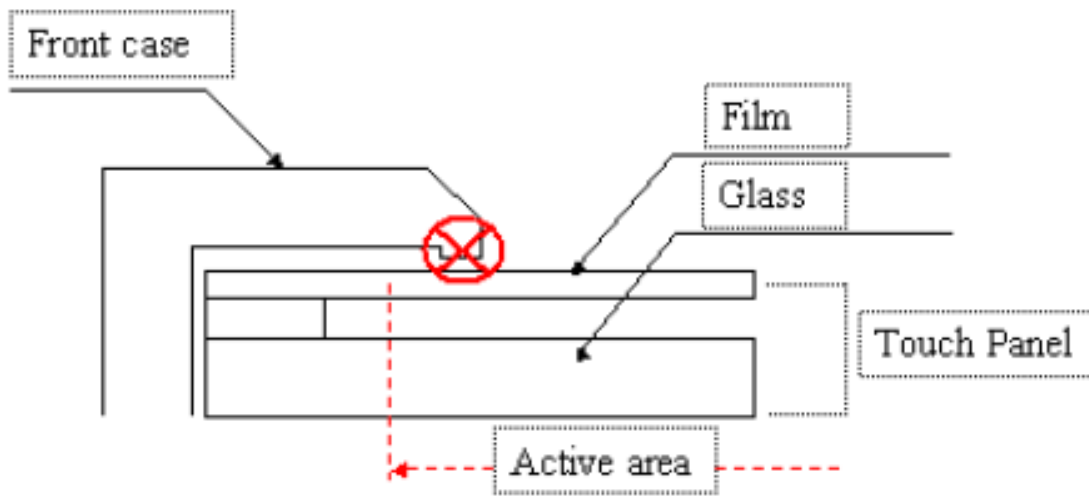

Use a buffer material (Gasket) between the touch-panel and front-case to protect damage and wrong operating. Avoid the design that buffer material overlap and press on the inside of touch-panel viewing area.

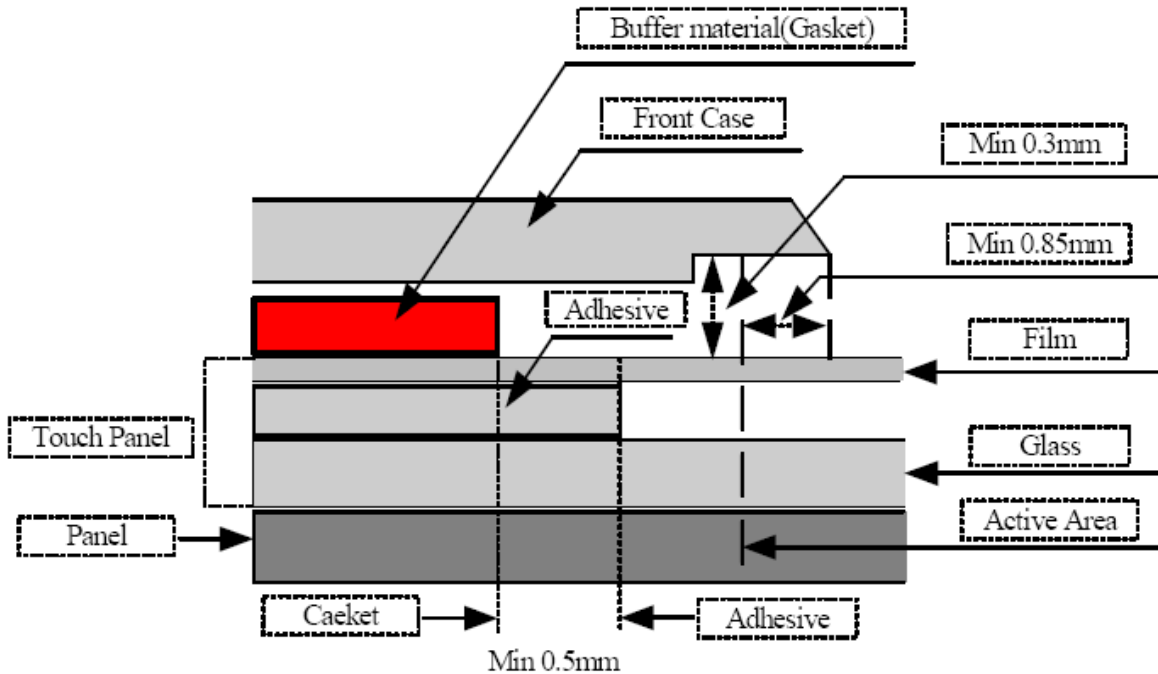

### 10.2 Pin assignment ( Pitch :1.0 mm)

Pin No	Symbol	Description	Remark
1	Y1	Upper electrode Y (Upper side)	
2	X2	Lower electrode X (Right side)	
3	Y2	Upper electrode Y (Down side)	
4	X1	Lower electrode X (Left side)	

### 10.3 Electrical Performance

Parameter	Symbol	Min	Typ	Max	Unit	Remark
Loop Resistance	X	200	-	900	$\Omega$	
	Y	200	-	900	$\Omega$	
Linearity		-	-	1.5	%	
Insulation Impedance		20	-	-	M $\Omega$	DC 25V
Response Time		-	-	10	ms	

### 10.4 Optical Performance

Parameter	Specifications
Transparency	$\geq 80\%$ (Inside of guaranteed active area)
Haze	Anti-Newton $\leq 10\%$

### 10.5 Mechanical Performance

Parameter	Specifications
Input Method	Finger or stylus pen
Operating Force	$\leq 40g \sim 110g$
Surface Hardness	$\geq 3H$

### 10.6 Durability Performance

Parameter	Specifications
Expected Life Performance	Operation tested to greater than 1 million touches in one location without failure, with a head of R6.5 and hardness Hs 60 stylus.

### 10.7 Environmental


Parameter	Specifications
Operating Temp.	-25°C~75°C (Except dew condensation)
Storage Temp.	-30°C~80°C (Except dew condensation)
Operating Humidity (Non Condensing)	20% RH~ 80%RH
Storage Humidity (Non Condensing)	10% RH~ 90%RH

### 10.8 Reliability test procedure

Parameter	Specifications
High temperature storage test	70°C for 240 hours.
Low temperature storage test	-40°C for 240 hours.
Thermal Cycling	-40°C (1 hr each)~70°C (1 hr each) for 10 cycles.
High temperature and high humidity	35°C, 90%RH for 240 hours.

# 11. Operation manual / Connection

## 11.1 Driver Board Manual

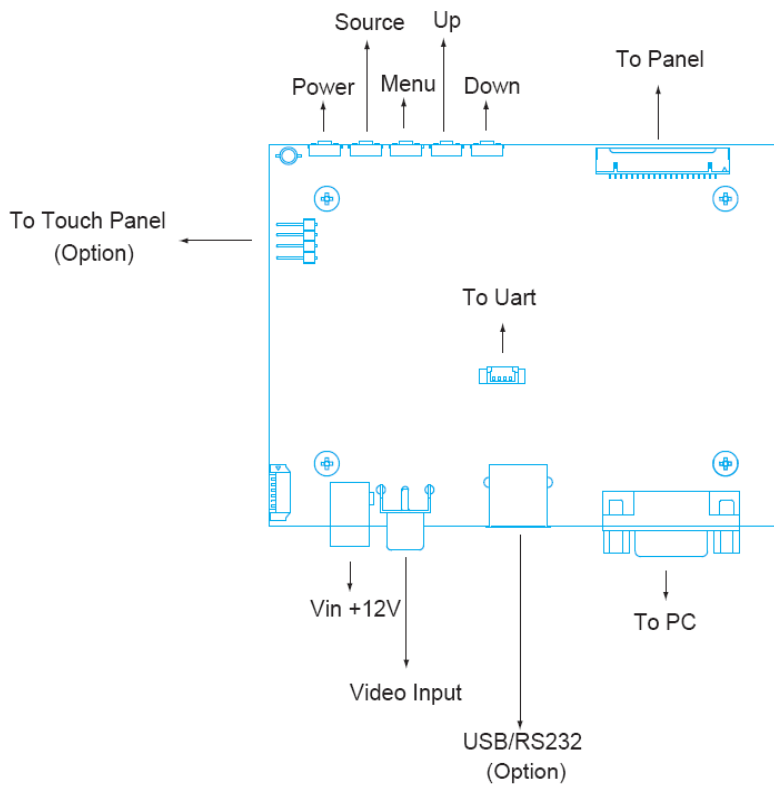

## 12. Packing List

Before you begin installing the KIT, please make sure that the following materials have been shipped:



A. LASTD12025-FDR



B. LAAC818000-FDR



C. LAVDO18000-FDR



D. LAVGA16000-FDR



E. LAUSB18000-FDR



F. LARS218000-FDR





G.

- A. AC to DC Adapter (L:1500mm, 100-240VAC 50-60Hz to +12VDC @ 2.5A)
- B. Power Cord ( L:1800mm, Plug Type B for USA)
- C. Video Cable (L:1800mm)
- D. VGA Cable (L:1600mm)
- E. USB Cable (L:1800mm)
- F. RS-232 Cable (L:1800mm)
- G. Touch Screen Driver CD Disk / User Manual

If any of these items are missing or damaged, contact your distributor or sales representative immediately.

## 13. Key Function by OSD

### 13.1 Menu Operation

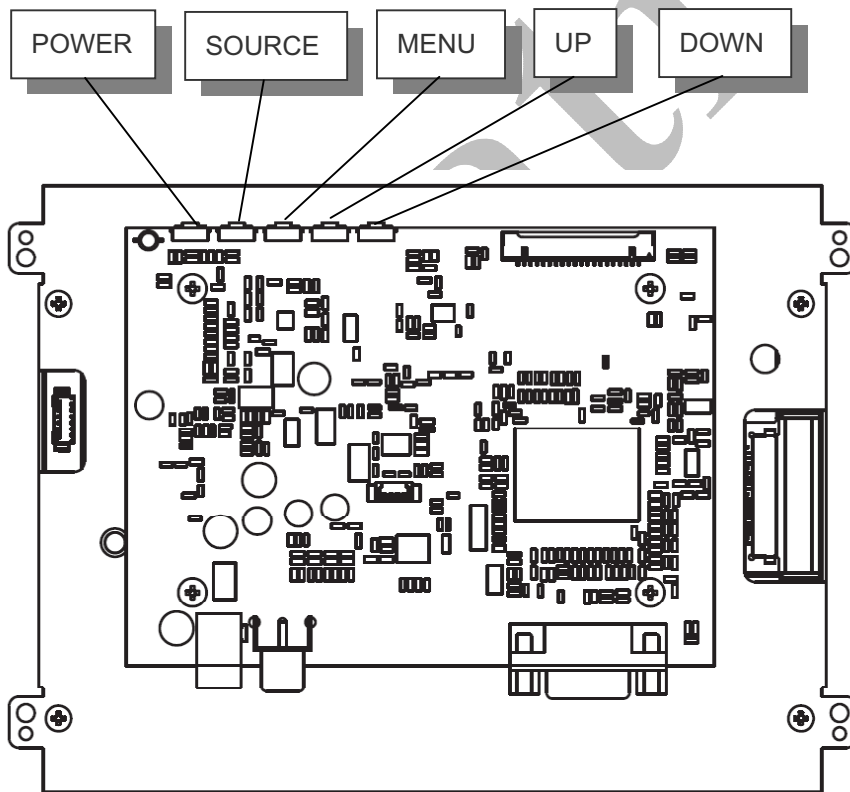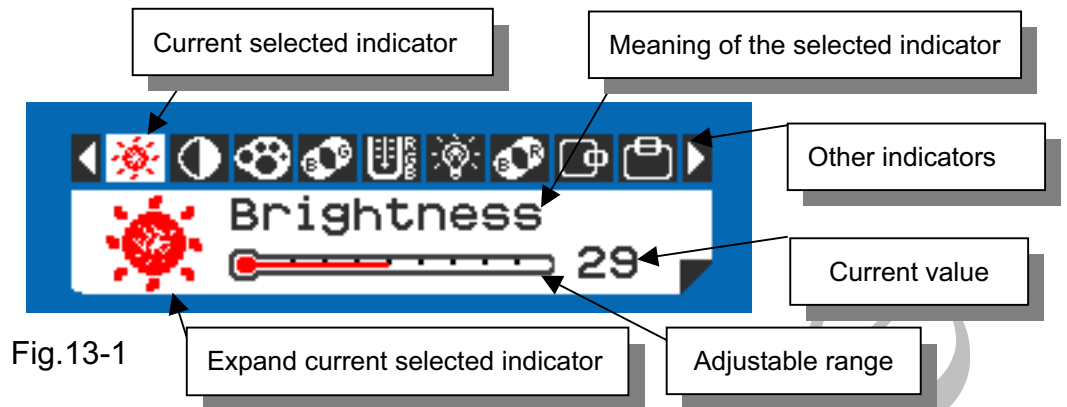

#### Operations of key board :

1. To navigate the menu, press [MENU]. (Fig.13-1)
2. The indicator lighting up in white color is the selected adjustment item.
3. To Next Item of the menu, press [MENU] again.
4. The operations below are only available when “Menu” is started.
5. Press [UP] / [DOWN] to adjust the value of the selected item.

## Overview of the menu :

Firmware must be  $\geq$  VER 0.26


















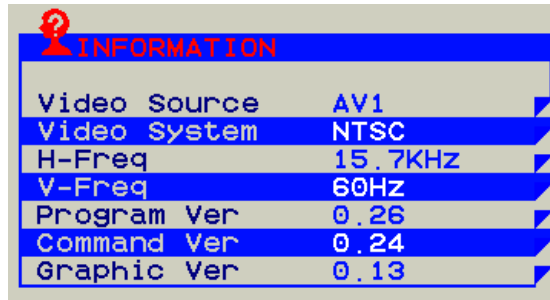
Indicator	Meaning	Adjustable range	For	Remark
	Brightness	0 ~ 64	AV / VGA	Adjust-Bar
	Contrast	0 ~ 64	AV / VGA	Adjust-Bar
	Color	0 ~ 64	AV	Adjust-Bar
	Tint	0 ~ 32	AV	Adjust-Bar
	Sharpness	0 ~ 16	AV	Adjust-Bar
	Dimmer	0 ~ 9	AV / VGA	
	Color Tone	Normal / Warm / Cool	AV / VGA	
	Mirror	OFF / ON	AV / VGA	
	Flip	OFF / ON	AV / VGA	
	H-Position	-25 ~ +25	AV / VGA	Balance-Bar
	V-Position	-10 ~ +10	AV / VGA	Balance-Bar
	Auto		VGA	
	Scan	Over Scan / Under Scan	AV	
	Information		AV / VGA	Fig.13-2
	Setup		AV / VGA	Fig.13-3
	Factory Set		AV / VGA	
	Exit		AV / VGA	

Fig.13-2



Setup Menu :



Fig.13-3

Indicator	Meaning	Adjustable range	Function	Remark
	Show Status	ON / OFF	Show signal status.	ON: Show OFF: Hidden
	Blue Screen	ON / OFF	If loss signal will put on the blue or black screen.	ON: Blue OFF: Black
	Auto Power On	ON / OFF	Power input module will be auto turn on.	ON: Auto OFF: Manual
	Auto Saving	OFF / 3s / 5s / 15s / 30s	If signal lost over setting times will be power off.	ON: Auto OFF: Normal
	Detect Source	ON / OFF	Auto detection which source is existence and change.	ON: Auto OFF: Normal
	Return			

Note : VGA only type don't have Detect Source function.



**13.2 Operations**

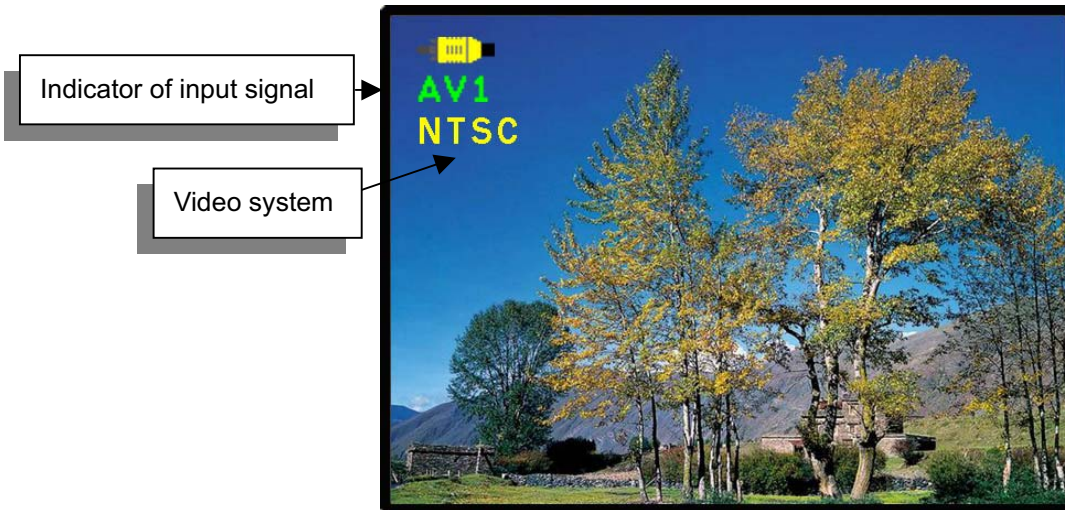




Fig.13-4

[Power] : Monitor power on / off

[Source] : Input signal switch

**Overview of input signals :**

Indicator	Input signal	Interface	Video system
	AV1	Composite	NTSC / PAL / SECAM
	VGA	Analog RGB	640x480_60 / 800x600_60 / 1024x768_60